
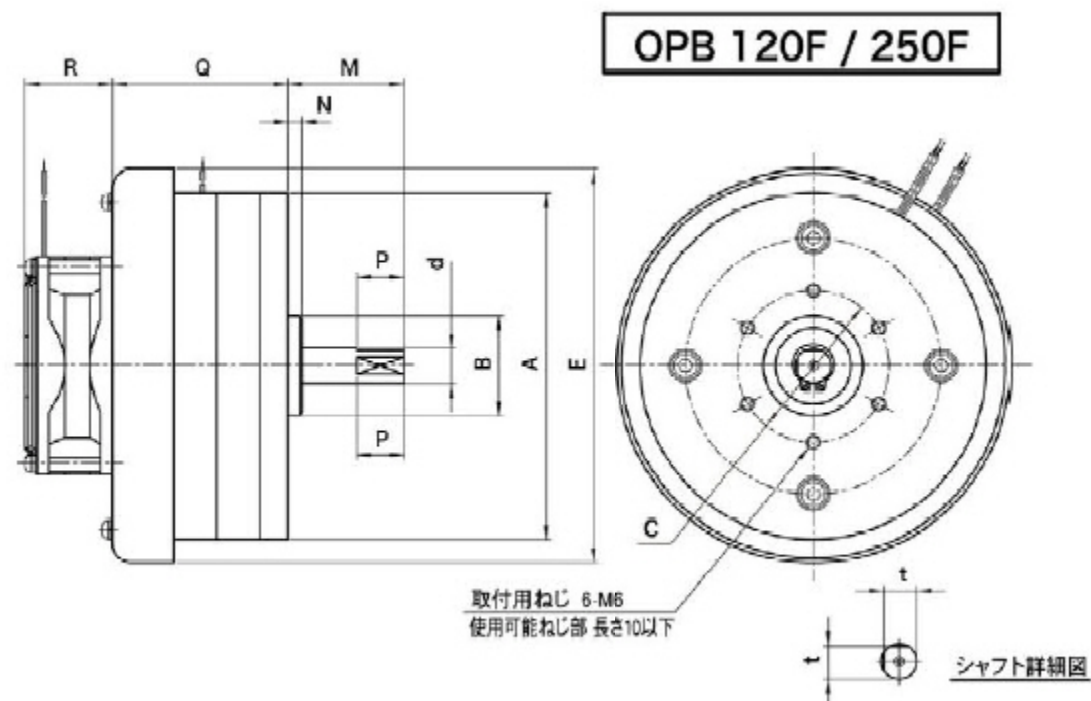


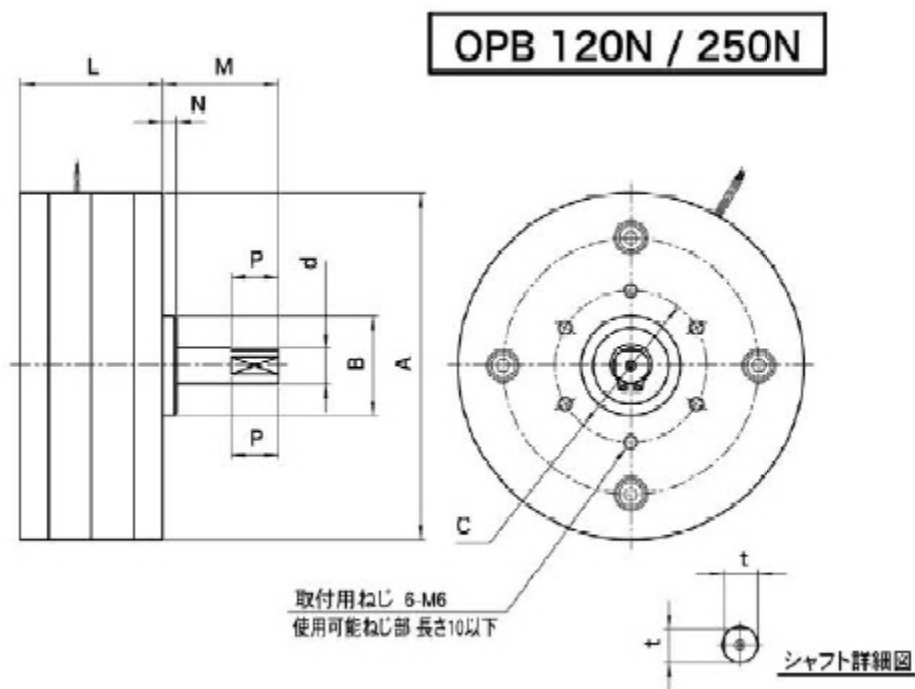

	A	B(h9)	C	d(g9)	E	L	M	N	P	Q	R	t
OPB 120N	φ146	φ42	φ64	φ15	—	60	49	6	20	—	—	14
OPB 250N	φ186	φ55	φ78	φ20	—	70	64	6	25	—	—	18.5
OPB 120F	φ146	φ42	φ64	φ15	φ166	—	49	6	20	74	37	14
OPB 250F	φ186	φ55	φ78	φ20	φ206	—	64	6	25	84	44	18.5

	Performance		Coil Reference Values		Max Slip Wattage [W]	Max Speed [RPM]
	Torque (Nm)	Current [A] (@75℃)	Voltage [DCV]	Wattage [W] (@20℃)		
OPB 120N	12	0.30	24	9	100	1800
OPB 250N	25				130	
OPB 120F	12				250	
OPB 250F	25				380	