


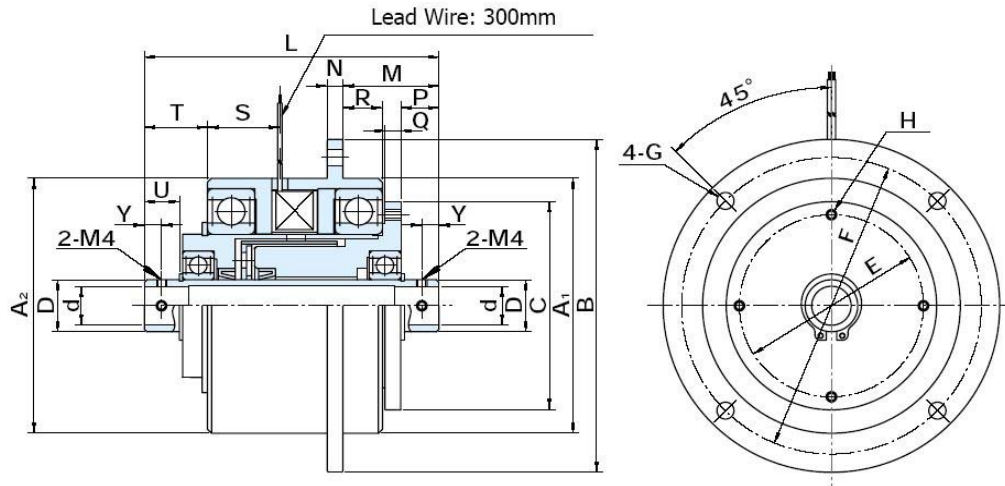

OPC		40	80
Rated Torque [in-lbs / N-m]		35 / 4	71 / 8
Coil (20°C)	Voltage [DC-V]	24	
	Current [A]	0.93	1.37
	Resistance [Ω]	26	17.6
	Wattage [W]	22	33
	Time Constant [ms]	25	50
Drag Torque (reference) [in-lbs]		0.71	1.4
Max Slip Wattage [W]		70	90
Max Allowable Speed [rpm]		1800	1800
Moment of Inertia (J) [kg-cm ²]	Input	3.25	5.25
	Output	0.288	0.388
Shaft [mm]		dH7	15
Dimensions [mm]	A1h8	86	98
	A2	86	98
	B	112	128
	Ch7	70	80
	D	20	20
	E	60	70
	F	100	114
	G	5.5	6.5
	H	4xM4	4xM4
	L	97	112
	M	32	36.5
	N	5	6
	P	10	14.5
	Q	6	6
	R	15	15
	S	25	27.5
	T	21	24
	U	8.8	13.3
	Y	4	6.5
Weight [lbs / kg]		5.3 / 2.4	6.8 / 3.1

[1" = 25.4mm]